


# Revo disc golf teepad operating and safety instructions.

Version 1.3

Applicable products: Revo 2.1, Revo 2.2, Revo 3.2, Revo 4.2, Revo 5.2 Pro

Revo disc golf platforms are safe and durable solution for frisbee golf use. Module based solution is fast to install and, due to their adjustability., is suitable for installation mostly without groundworks. Safety features include; large enough size, straightness, durability, clear visual perceptibility. In addition, the platforms have been raised off the ground, allowing rainwater to drain away and the substrate to dry quickly, resulting in consistent friction on the platform.

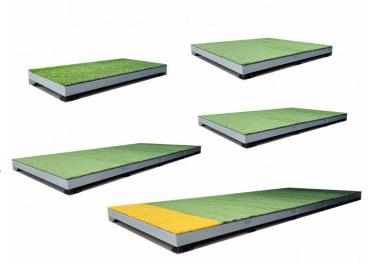

Disc golf platforms are delivered as

modules and each model is assembled according to its own installation instructions. The installation must ensure that the ground is sufficiently load-bearing so that the platform is firmly against the ground. The feet of the platform have an adjustment margin of 10 cm each and this must be taken into account in the design of the ground so that the platform can be installed horizontally. If necessary, the soil can be removed from under the feet. When installing, care must be taken to keep the height of the throwing platform low from the ground and it is recommended that a height of more than 30 cm is not desired when using adjustable feet. Sand (roughness 0.5-1.6mm) 25kg / module should be installed on the artificial turf of the platform.

### **Conditions for safe use:**

- 1. Platform may only be used by one person at a time.
- 2. The platform is securely installed.
- 3. The platform is horizontal.
- 4. The artificial turf is in good condition and proper sand has been added.
- 5. There is no additional items on the platform.
- 6. The platform is clear from ice and dry enough.
- 7. Module frame and deck must be intact and straight.

# The platform MUST NOT be used if;

- 1. The artificial turf is damaged or partially missing.
- 2. The platform is uneven on the ground or one of the feet is in the air.
- 3. The platform is slippery.
- 4. The platform modules are disconnected.
- 5. There is some damage to the module frame or deck.

### The platforms should be inspected once a year to ensure;

- 1. The artificial turf carpet is in good condition and sanded.
- 2. The modules are attached to each other and the screws are tightened.
- 3. The platform is firmly against the ground.

### Adjusting the platform

If necessary, the platform can be adjusted using the adjustable feet. The legs have a double forward and reverse thread. By adjusting the legs, the stability of the base can be ensured if the need arises. **SONES OY – FLATPAD.FI Järvenpääntie 69, 91910, Tupos, Finland, info@flatpad.fi**